



High Pass Filter and Low Pass Filter

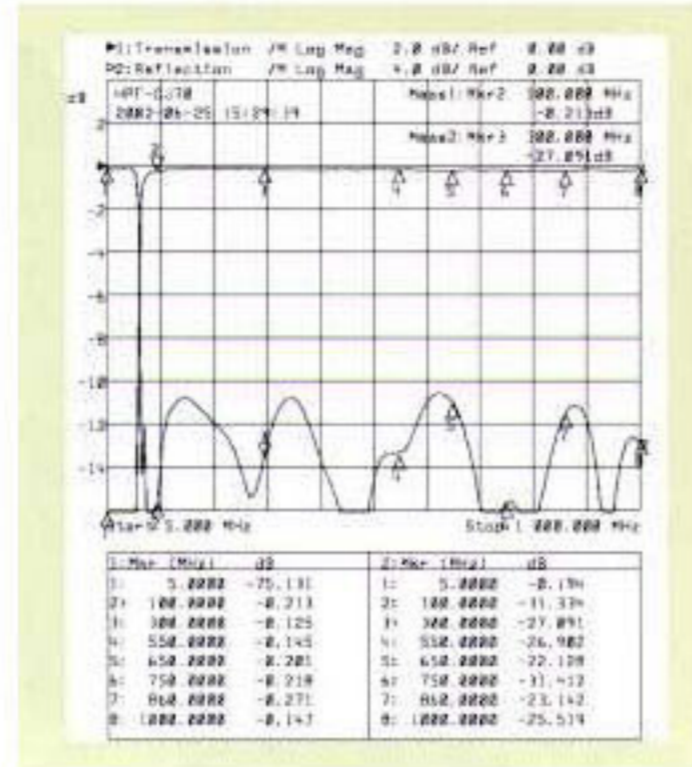

HPF-CJ87

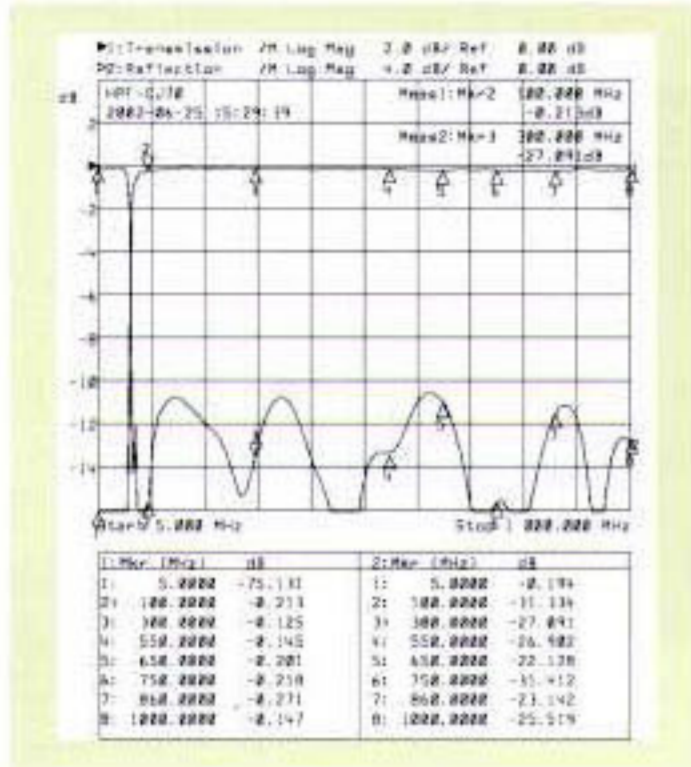

HPF-CK87



LPF-550

Use:

It is suitable for broadband communication systems.

Specifications:

Model	High Pass Filter		Low Pass Filter	
	HPF-CK45	HPF-CJ45	LPF-CK65	LPF-CJ65
Pass band frequency (MHz)	45~1000		5~65	
Stop band frequency (MHz)	5~30		87~1000	
Out-band rejection (dB)	> 40			
Insertion loss (dB)	< 1			
Return loss (dB)	> 16			
Impedance (Ω)	75			
Input connector	F type Female			
Output connector	F type Female	F type Male	F type Female	F type Male

Ordering information:

Please select pass band frequency and stop band frequency.