




STP Series Broadband Splitters

Tongue and groove housing design for improved EMI / RFI shielding.

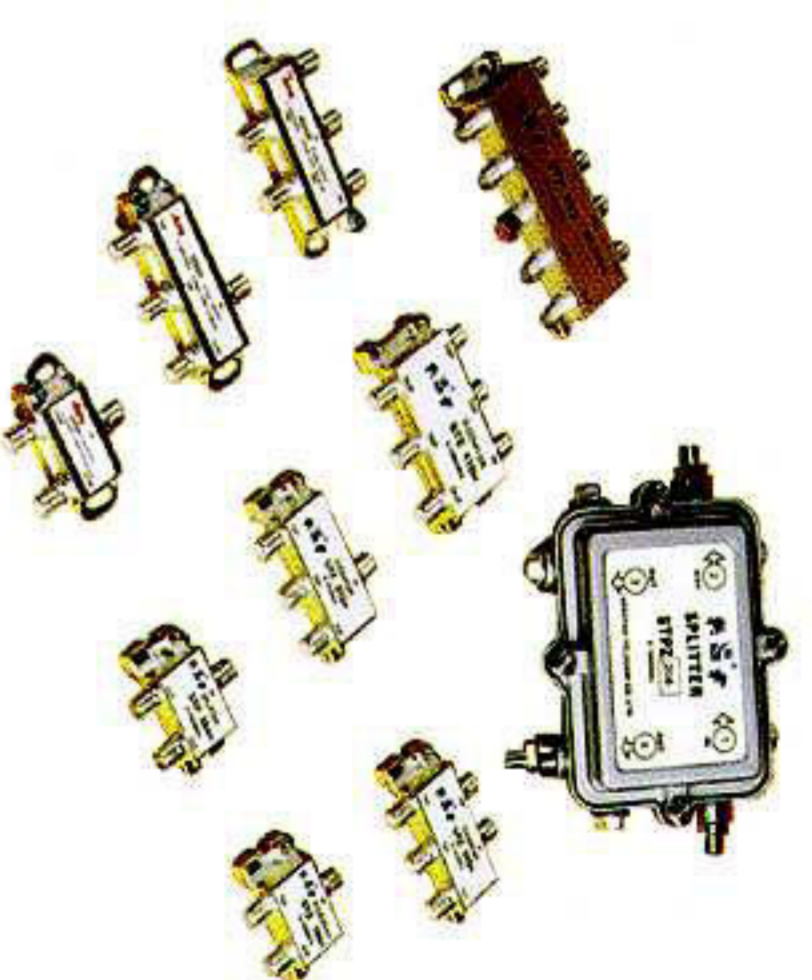

Item	Unit	Specifications									
		Indoor								Outdoor	
		2-Way	3-Way	4-Way	5-Way	6-Way	8-Way	2-Way	3-Way		
Insertion loss	(5-65)MHz	3.6	5.6	7.0	9.5	9.0	10.5	4.5	7.5		
	(65-550)MHz	3.8	5.8	7.5	9.5	9.5	10.8	4.2	6.8		
	(550-750)MHz	4.0	6.0	7.8	9.7	9.5	11.5	4.9	7.2		
(750-1000)MHz	dBMax.	4.2	6.5	8.2	10.7	10.5	12.5	5.5	7.9		
		25	25	25	25	25	25	25	25		
		28	25	25	25	25	25	25	25		
Isolation	dBMin.	25	22	16	16	20	22	14	14		
		16	16	16	16	16	16	16	16		
		16	16	16	16	16	16	16	16		
Return loss	dBMin.	14	14	14	14	14	14	14	14		
		16	16	16	16	16	16	16	16		
		16	16	16	16	16	16	16	16		
RFI shielding	dBMin.	110									
Signal hum ratio	dBMin.	/								66	
Current capacity	A	/								10	
Pass voltage	V	/								60 (50-60Hz)	