


1GHz Indoor Splitter


- ✦ Frequency range:5~1000MHz.
- ✦ Wall fixing, nickel-plated zinc die cast housing.
- ✦ All ports F female connector.
- ✦ RFI shielding up to 110 dB.

2-Way Splitter
Model:STP204

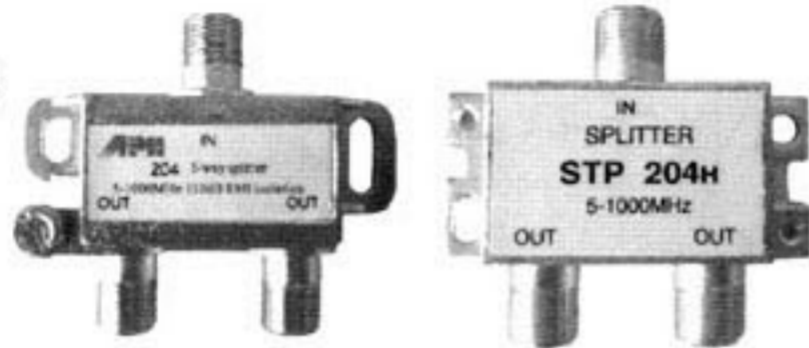


Item		Unit	2-Way Splitter STP204
Insertion Loss	(5~65)MHz	dBMax.	3.6
	(65~550)MHz		3.8
	(550~750)MHz		4.0
	(750~1000)MHz		4.2
Isolation	(5~65)MHz	dBMin.	25
	(65~550)MHz		28
	(550~750)MHz		25
	(750~1000)MHz		22
Return Loss	(5~65)MHz	dBMin.	16
	(65~550)MHz		16
	(550~750)MHz		16
	(750~1000)MHz		14
EMI Shielding		dBMin.	110

3-Way Splitter
Model:STP306

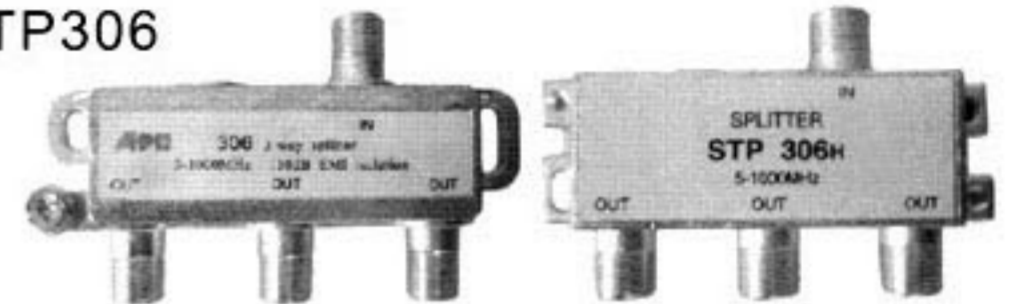


Item		Unit	3-Way Splitter STP306
Insertion Loss	(5~65)MHz	dBMax.	5.6
	(65~550)MHz		5.8
	(550~750)MHz		6.0
	(750~1000)MHz		6.5
Isolation	(5~65)MHz	dBMin.	25
	(65~550)MHz		28
	(550~750)MHz		25
	(750~1000)MHz		22
Return Loss	(5~65)MHz	dBMin.	16
	(65~550)MHz		16
	(550~750)MHz		16
	(750~1000)MHz		14
EMI Shielding		dBMin.	110

4-Way Splitter
Model:STP408

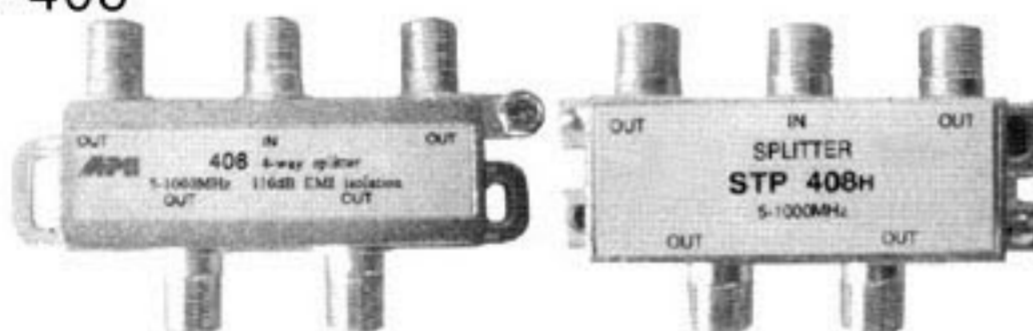

Item		Unit	4-Way Splitter STP408
Insertion Loss	(5~65)MHz	dBMax.	7.0
	(65~550)MHz		7.5
	(550~750)MHz		7.8
	(750~1000)MHz		8.2
Isolation	(5~65)MHz	dBMin.	25
	(65~550)MHz		28
	(550~750)MHz		25
	(750~1000)MHz		22
Return Loss	(5~65)MHz	dBMin.	16
	(65~550)MHz		16
	(550~750)MHz		16
	(750~1000)MHz		14
EMI Shielding		dBMin.	110

5-Way Splitter
Model:STP510

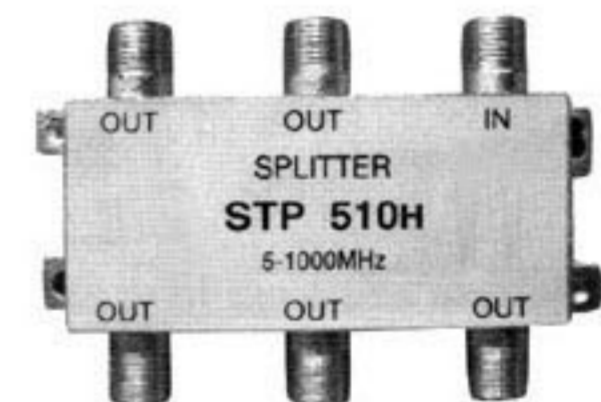

Item		Unit	5-Way Splitter STP510
Insertion Loss	(5~65)MHz	dBMax.	9.5
	(65~550)MHz		9.5
	(550~750)MHz		9.7
	(750~1000)MHz		10.7
Isolation	(5~65)MHz	dBMin.	25
	(65~550)MHz		25
	(550~750)MHz		25
	(750~1000)MHz		20
Return Loss	(5~65)MHz	dBMin.	16
	(65~550)MHz		16
	(550~750)MHz		16
	(750~1000)MHz		14
EMI Shielding		dBMin.	110